




## Rubber Buffers

### QUALITY S (Special quality)

This type of buffer offers several advantages and it can be used on a wider range of applications. Quality S buffers are highly resistant to atmospheric conditions, ageing, ozone and abrasion and they have an excellent chemical stability.

They are oil and seawater resistant and can be used in Tropical conditions. Their operating temperature range is from -30°C to +80°C.

In the event of you requiring a buffer for any special requirement not covered by the above conditions, we would advise that these can be manufactured on receipt of full information as to the working conditions and temperature in which they are to operate, subject to a minimum quantity.

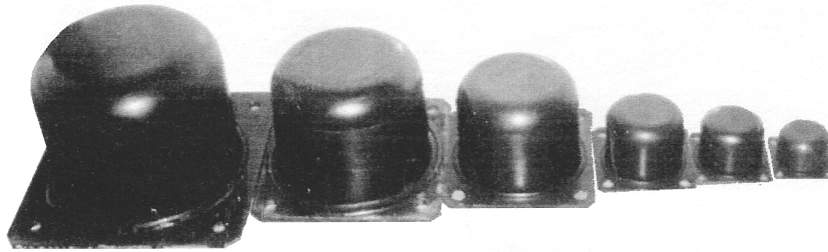

### Sizes in mm

PART NUMBER	d1	a	d2	e	h	r	s	CL	E m kp	FP kp	W kg	E Ft lbs	FP lbs
8-080	80	100	11	80	63	16	6	32	40	4000	.88	289	8800
8-100	100	125	13	100	80	20	8	40	80	6300	1.82	578	13860
8-125	125	160	17	125	100	25	8	50	160	10000	3.25	1157	22000
8-160	160	200	17	160	125	32	10	63	320	16000	6.50	2314	35200
8-200	200	250	21	200	160	40	10	80	630	25000	11.30	4556	55000
8-250	250	315	21	250	200	50	12	100	1250	40000	22.60	9041	88000
8-315	315	400	21	315	250	63	12	125	2500	63000	41.20	18082	138600

\*\* These values are valid only for impacts as experienced on crane buffers.