


ALLOY SCREW PIN SHACKLE

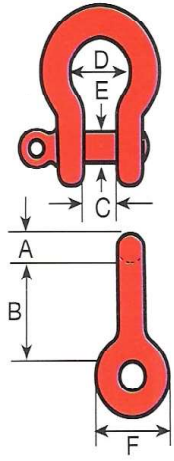


Chain Size mm	# WLL	A mm	B mm	C mm	D mm	E mm	F mm	Mass kg	Embossed WLL in 'T' (2000 lbs)
6,0	1700	9,5	37	17	26	11	25	0,14	1
7,0	3400	12,5	48	21	33	16	30	0,34	3
10,0	5100	16,0	60	27	43	19	40	0,65	4
13,0	7370	19,0	71	32	51	22	48	1,00	6
16,0	11340	25,4	95	43	68	29	60	2,40	10
20,0	13600	28,6	108	46	74	32	67	3,18	12
22,0	15875	31,8	119	52	83	35	76	4,35	14
25,5	22680	38,0	146	60	98	41	92	7,85	20
32,0	34000	44,5	178	73	127	51	110	12,60	30

All shackles are subjected to a proof load of twice the Working Load Limit above based on a factor of Safety of 4:1.

Exceeds the requirements of U.S. Federal Specification RR-C-271C Type IV Class 1.


*The shackles are embossed with a WLL in 'T' (2000 lbs) based on a Factor of Safety of 5:1.

CLEVIS SHORTENING CLUTCH

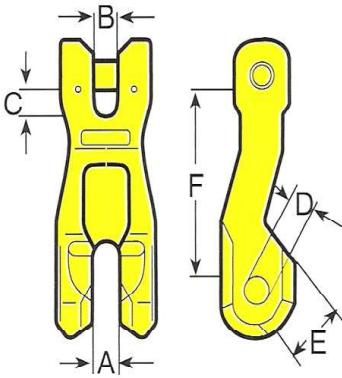


Chain size mm	Code No.	Dimensions mm					Mass kg
		A,B	C	D	E	F	
7/8	KC 7	8	10	9	16	62	0,4
10	KC 10	12	14	12	25	87	0,9
13	KC 13	16	17	15	32	115	1,9
16	KC 16	20	19	19	39	143	3,2

CLEVIS REEVABLE MASTER LINK

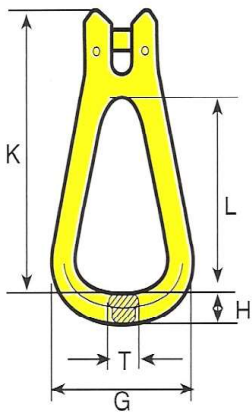

Chain size mm	Code No.	Dimensions mm					Mass kg
		K	L	G	T	H	
7,0 - 8,0	YG01	124	87	75	14	15	0,4
10,0	YG02	155	108	96	18	19	0,7
13,0	YG03	196	136	108	23	22	1,3
16,0	YG04	239	165	124	24	26	2,6

CLEVIS SHACKLE

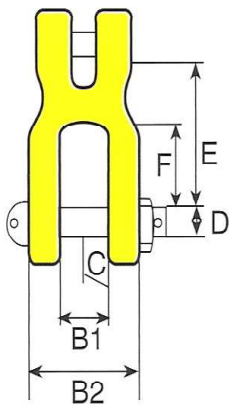

Chain size mm	WLL	Dimensions mm						Mass kg
		E	D	C	F	B1	B2	
10,0	3,15	64	16	32	36	21	47	0,62
13,0	5,3	83	20	40	49	27	61	1,16