




AA
Eye-Eye

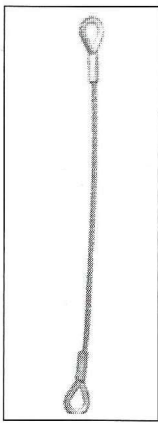


TE
Thimble-Thimble




OSS
Safety Sling Hook

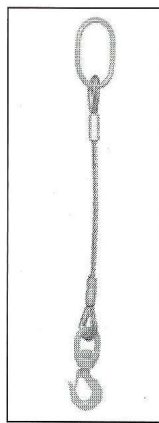


OSWS
Safety Swivel Hook

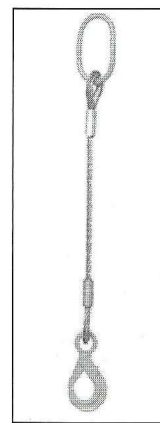


OSL
Self-Locking Hook

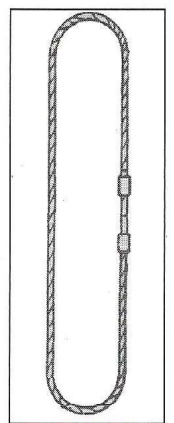


GSL




DOSS




DOSWS




DOSL




DOSCS

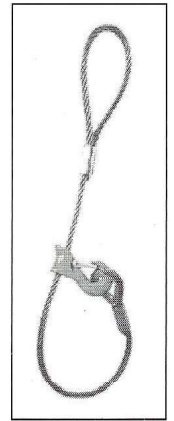


ASCS
Safety Sliding Choker Hook




DORR




TORR




TOSS




TOSWS

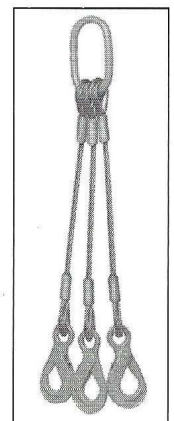


TOSL




QORR



QOSS









QOSWS



QOSL

Working load limit (WLL) of wire rope slings assemblies

The data supplied applies to hand and mechanically spliced slings in the more popular rope diameters and configurations.			1 Leg - 1 Part		2 Legs - 1 Part each				2 Legs - 2 Parts each		Endless	Max permitted angle 90°
ROPE CONSTRUCTION	Rope Diameter	Est. Breaking Force										mm
			Vertical Lift	Choker Hitch	Halshing Sling	Cradle Sling	30°	60°	90°	120°	Reeving Sling	
MINIMUM PERMITTED FACTOR OF SAFETY			6:1	6:1	6:1	6:1	6:1	6:1	6:1	6:1	8:1	
6 x 19 (9/9/1)F 1800 MPa RH Ordinary lay	mm	kN	t	t	t	t	t	t	t	t	t	
	10	59	1.00	1.50	1.41	1.93	1.73	1.41	1.00	1.06	1.13	10
	13	101.8	1.73	2.59	2.44	3.34	2.99	2.44	1.73	1.83	1.95	13
	13	102.5	1.74	2.61	2.46	3.36	3.01	2.46	1.74	1.85	1.96	13
	16	156.3	2.66	3.98	3.74	5.13	4.59	3.74	2.66	2.81	2.99	16
6 x 36 (14/7 + 7/7/1)F 1800 MPa RH Ordinary Lay	19	221.4	3.76	5.64	5.30	7.26	6.51	5.30	3.76	3.99	4.23	19
	20	242.2	4.12	6.18	5.81	7.95	7.12	5.81	4.12	4.37	4.63	20
	22	297	5.05	7.57	7.11	9.74	8.73	7.11	5.05	5.35	5.68	22
	24	342.2	5.81	8.72	8.20	11.22	10.06	8.20	5.81	6.16	6.54	24
	26	405.8	6.89	10.34	9.72	13.31	11.93	9.72	6.89	7.31	7.76	26
6 x 36 (14/7 + 7/7/1)WRC 1800 MPa RH Ordinary Lay	28	479.7	8.15	12.22	11.49	15.73	14.10	11.49	8.15	8.64	9.17	28
	32	627.2	10.66	15.98	15.02	20.57	18.43	15.02	10.66	11.30	11.99	32
	13	113.5	1.93	2.89	2.72	3.72	3.34	2.72	1.93	2.04	2.17	13
	16	172.4	2.93	4.39	4.13	5.65	5.07	4.13	2.93	3.10	3.30	16
	18	217.3	3.69	5.54	5.21	7.13	6.39	5.21	3.69	3.91	4.15	18
6 x 36 (14/7 + 7/7/1)WRC 1800 MPa RH Ordinary Lay	19	243.7	4.14	6.21	5.84	7.99	7.16	5.84	4.14	4.39	4.66	19
	20	268.8	4.57	6.85	6.44	8.81	7.90	6.44	4.57	4.84	5.14	20
	22	326.8	5.55	8.33	7.83	10.72	9.61	7.83	5.55	5.89	6.25	22
	24	393.2	6.68	10.02	9.42	12.89	11.56	9.42	6.68	7.08	7.52	24
	26	449.4	7.64	11.45	10.77	14.74	13.21	10.77	7.64	8.09	8.59	26
Load factor of sling Ass. (Effect of Sling Configuration	28	529	8.99	13.48	12.67	17.35	15.55	12.67	8.99	9.53	10.11	28
	32	691.6	11.76	17.64	16.58	22.70	20.35	16.58	11.76	12.47	13.22	32
			1.00	1.50	1.41	1.93	1.73	1.41	1.00	1.06	1.50	